



Características técnicas / Technical characteristics

Descripción / Description	TX102	TX105-80	TX105-36
Tensión nominal Rated voltage	90-264V AC 50/60Hz	10-80V DC	4-36V AC/DC 50/60Hz
Consumo Power consumption	0.5 VA	0.25 W	1 W
Registro/ Register	6 digits (3.6 mm)		
Lectura / Readout	99999.9		
Contaje mínimo / Least Count	0.1 Hrs		
Precisión / Accuracy	±0.02% en todo el rango / Over entire range		
Temperatura de trabajo Operating temperature	-40°C to 85°C		
Peso / Weight	47 grs.		

Dimensiones Dimensions



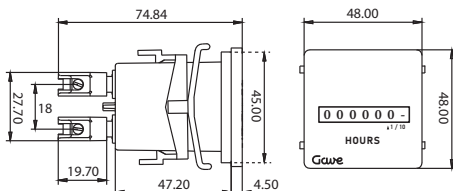


Diagrama de conexión / Connection diagram

Para aplicaciones DC / For DC applications



Para aplicaciones AC / For AC applications

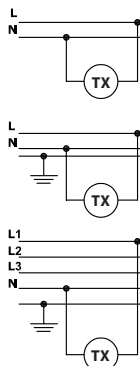

-40/+85° C max



⚠ PELIGRO / DANGER

TENSIÓN PELIGROSA Únicamente el personal de mantenimiento eléctrico especializado deberá instalar y prestar servicios de mantenimiento a este equipo. Cortar la alimentación del equipo antes de realizar cualquier trabajo en él. Utilice siempre un dispositivo detector de tensión adecuado para confirmar la falta de tensión en el equipo. El incumplimiento de estas precauciones podrá causar la muerte o lesiones graves.

HAZARDOUS VOLTAGE This equipment must be installed and serviced only by qualified electrical personnel. Turn off all power supplying this equipment before working on or inside equipment. Always use a properly rated voltage sensing device to confirm power is off. Failure to follow these instructions will result in death or serious injury.