



Digital Hour Meter is manufactured to a high precision and accuracy.

Main Features :

- Wide supply voltage.
- Large 6-digit display, easy to read.
- Exceptional reliability due to nonvolatile memory (EEPROM) which can retain the data for 100 years.
- Available in 3 different shaped Bezels
- Low power consumption.
- Electrical Reset and Enable.

Installation Notes :

1. When Power is applied between Terminals 1 and 2, after 4 Sec. the display will show the recorded hours.
2. Connect Terminal 3 [Enable] to Terminal 1 [Supply] to begin recording the time.
3. To Reset the unit, connect Terminal 4 [Reset] momentarily (≈ 500 msec.) to Terminal 1[Supply] via a push button, a key switch or potential free relay contacts.

TECHNICAL SPECIFICATIONS

PART NO.	TXD615	TXD615-80	TXD615-48
SUPPLY CHARACTERISTICS			
Supply Voltage	85 - 265 VAC 50/60 Hz	10 - 80 VDC	12-48 V AC/DC 50/60 Hz
VI Rating	0.8 VA	0.6 watt	0.4 watt

FEATURES CHARACTERISTICS

Range	99999.9 Hours
Resolution	0.1 Hours
Accuracy	+/- 0.02%
Mounting	Flush / Panel Mounting
Temperature Limits	Operating : -10°C to +50°C Storage : -20°C to +65°C

CERTIFICATIONS

CE, RoHS	
Fast Transients	IEC-61000-4-4 Level IV
Surges	IEC-61000-4-5 Level IV
Voltage Dips	IEC-61000-4-11(AC)
Voltage Interruption	IEC-61000-4-29(DC)



Digital Hour Meter is manufactured to a high precision and accuracy.

Main Features :

- Wide supply voltage.
- Large 6-digit display, easy to read.
- Exceptional reliability due to nonvolatile memory (EEPROM) which can retain the data for 100 years.
- Available in 3 different shaped Bezels
- Low power consumption.
- Electrical Reset and Enable.

Installation Notes :

1. When Power is applied between Terminals 1 and 2, after 4 Sec. the display will show the recorded hours.
2. Connect Terminal 3 [Enable] to Terminal 1 [Supply] to begin recording the time.
3. To Reset the unit, connect Terminal 4 [Reset] momentarily (≈ 500 msec.) to Terminal 1[Supply] via a push button, a key switch or potential free relay contacts.

TECHNICAL SPECIFICATIONS

PART NO.	TXD615	TXD615-80	TXD615-48
SUPPLY CHARACTERISTICS			
Supply Voltage	85 - 265 VAC 50/60 Hz	10 - 80 VDC	12-48 V AC/DC 50/60 Hz
VI Rating	0.8 VA	0.6 watt	0.4 watt



FEATURES CHARACTERISTICS

Range	99999.9 Hours
Resolution	0.1 Hours
Accuracy	+/- 0.02%
Mounting	Flush / Panel Mounting
Temperature Limits	Operating : -10°C to +50°C Storage : -20°C to +65°C

CERTIFICATIONS

CE, RoHS	
Fast Transients	IEC-61000-4-4 Level IV
Surges	IEC-61000-4-5 Level IV
Voltage Dips	IEC-61000-4-11(AC)
Voltage Interruption	IEC-61000-4-29(DC)

OVERALL AND MOUNTING DIMENSIONS

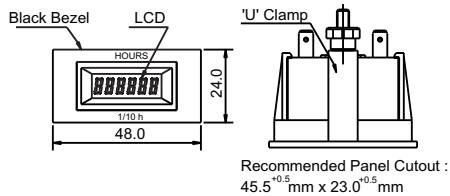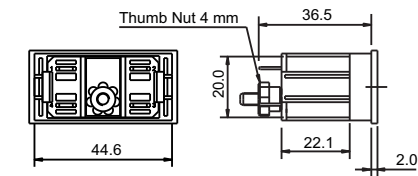

Notes :-

Use lugs provided with product for electrical connection with terminals.


TERMINAL DESCRIPTION

- Pin 1: Supply (~ / +)
- 2: Supply (~ / -)
- 3: Enable
- 4: Reset

DIGITAL HOUR METER



PART NO.	Supply Voltage
TXD615	85 - 265 VAC
TXD615-80	10 - 80 VDC
TXD615-48	12-48 V AC/DC

Bezel: 24 x 48 Bezel

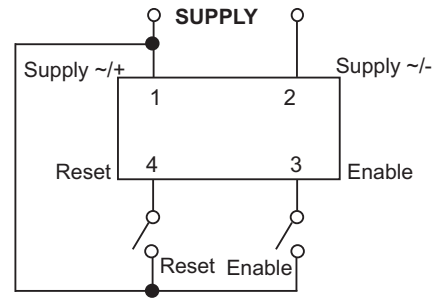

ZLL015 - 00

OVERALL AND MOUNTING DIMENSIONS

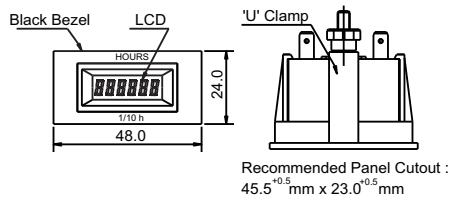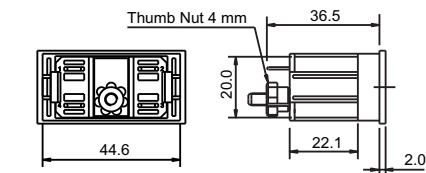

Notes :-

Use lugs provided with product for electrical connection with terminals.


TERMINAL DESCRIPTION

- Pin 1: Supply (~ / +)
- 2: Supply (~ / -)
- 3: Enable
- 4: Reset

DIGITAL HOUR METER

PART NO.	Supply Voltage
TXD615	85 - 265 VAC
TXD615-80	10 - 80 VDC
TXD615-48	12-48 V AC/DC

Bezel: 24 x 48 Bezel

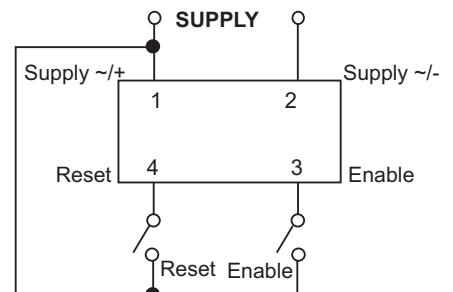

ZLL015 - 00