

## A-8404100

CIRCUIT BREAKER FOR MOTOR STARTING 40A.D1

<b>Code</b>	009A-8404100
-------------	--------------

<b>EAN</b>	8430892107358
------------	---------------

**Product description**

Motor start switch, IP20 with 0-1-2 grey front plate with start circuit and return to 1" 64x64 for panel fixing, 40A. Size D1. Ergonomic screwless quick-mount handle. Connection with cage terminals for 6-16 mm<sup>2</sup> cable. Compatible with multiple accessories from the A5 series. "

---

## Logistic data

Customs code	85365080
ETIM code	EC002611
Package units	1
Package height (mm)	95
Package width (mm)	68
Package length (mm)	68

## Technical data


Poles	2
Operational rating (Ie)	40 A
Thermal rating (Ith)	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm <sup>2</sup>
Wire section flexible	6 - 16 mm <sup>2</sup>
Tightening torque	2 Nm
Connection screws	M5

### Terminal



Max. fuse protection (gG/aM)	40/32 A (415 V)
	40/32 A (500 V)
Conditional shortcircuit current (Icc)	6 kA (415 V)
	6 kA (500 V)
Insulating voltage (V~)	690
	600
Dummy AC-21A	15 kW (3x230 V)
	22 kW (3x415 V)
	30 kW (3x500 V)
Mixed load AC-22A	11 kW (3x230 V)
	22 kW (3x415 V)
	22 kW (3x500 V)
Motor load AC-23A	11 kW (3x230 V)
	18,5 kW (3x415 V)
	22 kW (3x500 V)
UL Electric characteristics	2 hp 1-phase (110-120 V)
	5 hp 1-phase (220-240 V)
	7,5 hp 3-phase (220-240 V)
	10 hp 3-phase (380-415 V)
	15 hp 3-phase (440-480 V)
	20 hp 3-phase (550-600 V)
Standard	IEC 60947-3
	UL 508
Handle type	Directo

Connection

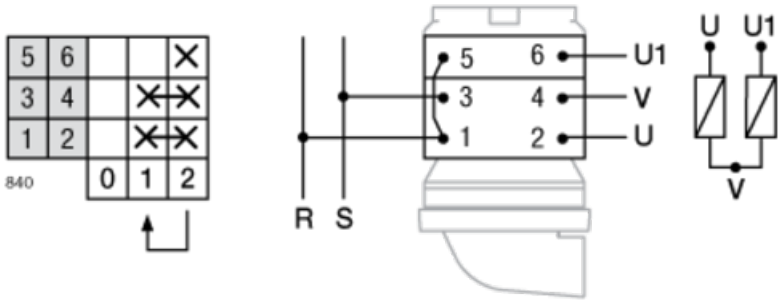

Dimensions

