

A-552B100

ON-OFF SWITCH DISCONNECTOR 3P 200A.D3



Code	009A-552B100
EAN	8430892156028
Product description	Cam switch-disconnector, IP20 with 0-1 red front plate 64x64 for panel fixing. 3 poles 200A. Size D3. Ergonomic screwless quick-mount handle. Cable lug terminal connection for 95 mm ² cable. Compatible with multiple accessories from the A5 series.

Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1
Product gross weight (kg)	0.96
Package height (mm)	167
Package width (mm)	121
Package length (mm)	106

Technical data



Poles	3
Operational rating (Ie)	200 A
Thermal rating (Ith)	200 A
Wire section flexible	95 mm ²
Connection screws	M8

Terminal



Max. fuse protection (gG/aM)	200 A (415 V)
	200 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	55 kW (3x230 V)
	110 kW (3x415 V)
	132 kW (3x500 V)
Mixed load AC-22A	55 kW (3x230 V)
	110 kW (3x415 V)
	110 kW (3x 500 V)
Motor load AC-23A	55 kW (3x230 V)
	90 kW (3x415 V)
Standard	IEC 60947-3
Handle type	Directo

Connection

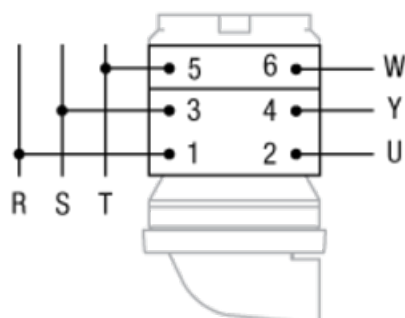

Dimensions

