

A-6221000

CHANGEOVER SWITCH 2P 4 POS.16A.D0

Code	009A-6221000
EAN	8430892104975

Product description

Changeover step switch, IP20 with 0-1-2-3-4 grey front plate 48x48 for panel fixing. 2 poles 16A. Size D0. Ergonomic screwless quick-mount handle. Connection with cage terminals for 2.5-6 mm² cable. Compatible with multiple accessories from the A5 series.

Logistic data


Customs code	85365080
ETIM code	EC002611
Package units	1
Package height (mm)	110
Package width (mm)	50
Package length (mm)	50

Technical data

Poles	2
Operational rating (Ie)	16 A
Thermal rating (Ith)	20 A
Wire section (AWG)	10
Wire section rigid	2,5 - 6 mm ²
Wire section flexible	2,5 - 6 mm ²
Tightening torque	1,6 Nm
Connection screws	M4
Terminal	
Max. fuse protection (gG/aM)	25/25 A (415 V) 25/25 A (500 V)
Conditional shortcircuit current (Icc)	6 kA (415 V) 6 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	400
Dummy AC-21A	5,5 kW (3x230 V) 11 kW (3x415 V) 15 kW (3x500 V)
Mixed load AC-22A	4 kW (3x230 V) 7,5 kW (3x415 V) 11 kW (3x500 V)
Motor load AC-23A	3 kW (3x230 V) 5,5 kW (3x415 V) 7,5 kW (3x500 V)
UL Electric characteristics	1,5 hp 1-fase (110-120 V) 2 hp 1-fase (220-240 V) 2 hp 3-fase (220-240 V) 2 hp 3-fase (380-415 V) 3 hp 3-fase (440-480 V) 5 hp 3-fase (550-600 V)
Standard	IEC 60947-3 UL 508
Handle type	Directo

Connection

15	16					X
13	14					X
11	12				X	
9	10				X	
7	8			X		
5	6			X		
3	4		X			
1	2		X			
622		0	1	2	3	4

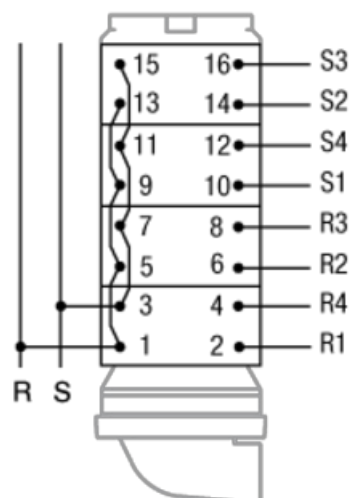

Dimensions

