

A-6310000

CHANGEOVER SWITCH 3P 3 POS.12A.D0

Code	009A-6310000
EAN	8430892105415

Product description

Changeover step switch, IP20 with 0-1-2-3 grey front plate 48x48 for panel fixing. 3 poles 12A. Size D0. Ergonomic screwless quick-mount handle. Connection with cage terminals for 2.5-6 mm² cable. Compatible with multiple accessories from the A5 series.

Logistic data


Customs code	85365080
ETIM code	EC002611
Package units	1
Product gross weight (kg)	0.17
Package height (mm)	110
Package width (mm)	50
Package length (mm)	50

Technical data

Poles	3
Operational rating (Ie)	12A
Thermal rating (Ith)	16 A
Wire section (AWG)	10
Wire section rigid	2,5 - 6 mm ²
Wire section flexible	2,5 - 6 mm ²
Tightening torque	1,6 Nm
Connection screws	M4
Terminal	
Max. fuse protection (gG/aM)	25/25 A (415 V) 25/25 A (500 V)
Conditional shortcircuit current (Icc)	6 kA (415 V) 6 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	400
Dummy AC-21A	3 kW (3x230 V) 7,5 kW (3x415 V) 11 kW (3x500 V)
Mixed load AC-22A	2,2 kW (3x230 V) 5,5 kW (3x415 V) 7,5 kW (3x500 V)
Motor load AC-23A	2,2 kW (3x230 V) 4 kW (3x415 V) 5,5 kW (3x500 V)
UL Electric characteristics	1 hp 1-fase (110-120 V) 1,5 hp 1-fase (220-240 V) 1 hp 3-fase (220-240 V) 2 hp 3-fase (380-415 V) 3 hp 3-fase (440-480 V) 3 hp 3-fase (550-600 V)
Standard	IEC 60947-3 UL 508
Handle type	Directo

Connection

n.º de ref. 631	1 3		5 7		9 11		13 15		17 19		21 23		25 27		29 31		33 35		37 39		41 43		45 47	
	2 4	6 8	10 12	14 16	18 20	22 24	26 28	30 32	34 36	38 40	42 44	46 48												
1- 0																								
2- 1	x				x		x																	
3- 2			x	x					x															
4- 3		x					x		x															
5-																								
6-																								
7-																								
8-																								
9-																								
10-																								
11-																								
12-																								
x contacto cerrado		↕ contacto cerrado en varias posiciones sin interrupción		↪ retorno de la última posición a la anterior																				

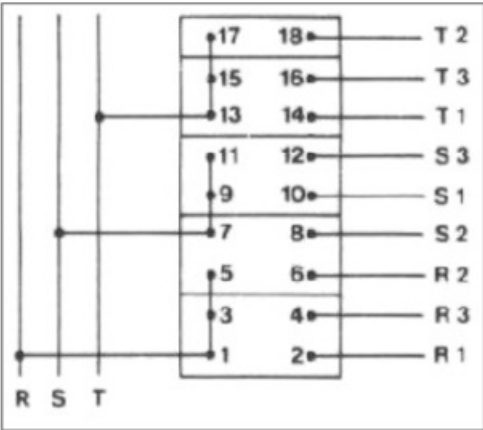

Dimensions

