

## A-6814100

POLE CHANGING SWITCH 2 SPEEDS 0 CENTER40A.D1



<b>Code</b>	009A-6814100
<b>EAN</b>	8430892106283
<b>Product description</b>	Pole changing switch : DAHLANDER 2 speeds, IP20 with 1-0-2 grey front plate single winding" 64x64 for panel fixing, 40A. Size D1. Ergonomic screwless quick-mount handle. Connection with cage terminals for 6-16 mm <sup>2</sup> cable. Compatible with multiple accessories from the A5 series. "

**Logistic data**



---

Customs code	85365080
ETIM code	EC002611
Package units	1
Product gross weight (kg)	0.365
Package height (mm)	123
Package width (mm)	68
Package length (mm)	68

## Technical data

<b>Poles</b>	3
<b>Operational rating (Ie)</b>	40 A
<b>Thermal rating (Ith)</b>	40 A
<b>Wire section (AWG)</b>	6
<b>Wire section rigid</b>	6 - 25 mm <sup>2</sup>
<b>Wire section flexible</b>	6 - 16 mm <sup>2</sup>
<b>Tightening torque</b>	2 Nm
<b>Connection screws</b>	M5
<b>Terminal</b>	
<b>Max. fuse protection (gG/aM)</b>	40/32 A (415 V) 40/32 A (500 V)
<b>Conditional shortcircuit current (Icc)</b>	6 kA (415 V) 6 kA (500 V)
<b>Insulating voltage (V~)</b>	690
<b>Insulating voltage (V...)</b>	600
<b>Dummy AC-21A</b>	15 kW (3x230 V) 22 kW (3x415 V) 30 kW (3x500 V)
<b>Mixed load AC-22A</b>	11 kW (3x230 V) 22 kW (3x415 V) 22 kW (3x500 V)
<b>Motor load AC-23A</b>	11 kW (3x230 V) 18,5 kW (3x415 V) 22 kW (3x500 V)
<b>UL Electric characteristics</b>	2 hp 1-phase (110-120 V) 5 hp 1-phase (220-240 V) 7,5 hp 3-phase (220-240 V) 10 hp 3-phase (380-415 V) 15 hp 3-phase (440-480 V) 20 hp 3-phase (550-600 V)
<b>Standard</b>	IEC 60947-3 UL 508
<b>Handle type</b>	Directo

Connection

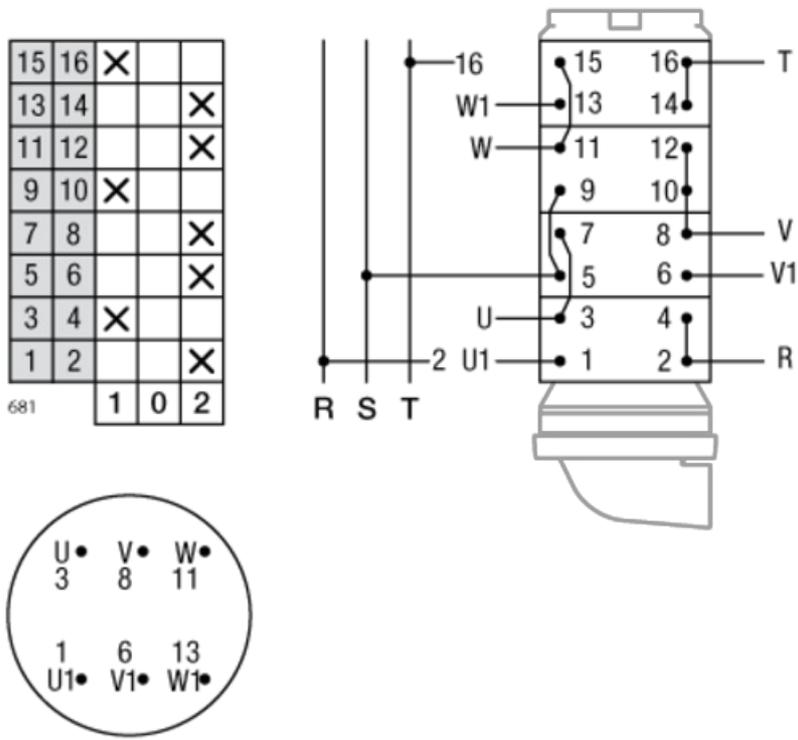

Dimensions

