

## A-6816100

POLE CHANGING SWITCH 2 SPEEDS 0 CENTER63A.D2

<b>Code</b>	009A-6816100
<b>EAN</b>	8430892106290

---

**Product description**

Pole changing switch : DAHLANDER 2 speeds, IP20 with 1-0-2 grey front plate single winding" 64x64 for panel fixing, 63A. Size D2. Ergonomic screwless quick-mount handle. Connection with cage terminals for 16-50 mm<sup>2</sup> cable. Compatible with multiple accessories from the A5 series. "

---


## Logistic data

Customs code	85365080
ETIM code	EC002611
Package units	1
Package height (mm)	163
Package width (mm)	88
Package length (mm)	86

## Technical data

Poles	3
Operational rating (Ie)	63 A
Thermal rating (Ith)	70 A
Wire section (AWG)	16 - 1
Wire section flexible	16 - 50 mm <sup>2</sup>
Tightening torque	3,5 Nm
Connection screws	M8



### Terminal



Max. fuse protection (gG/aM)	63/63 A (415 V)
	63/63 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	22 kW (3x230 V)
	45 kW (3x415 V)
	45 kW (3x500 V)
Mixed load AC-22A	18,5 kW (3x230 V)
	37 kW (3x415 V)
	45 kW (3x500 V)
Motor load AC-23A	18,5 kW (3x230 V)
	30 kW (3x415 V)
	37 kW (3x500 V)
UL Electric characteristics	5 hp 1-fase (110-120 V)
	10 hp 1-fase (220-240 V)
	15 hp 3-fase (220-240 V)
	25 hp 3-fase (380-415 V)
	30 hp 3-fase (440-480 V)
	32 hp 3-fase (550-600 V)
Standard	IEC 60947-3 UL 508
Handle type	Directo

Connection

15	16	X		
13	14			X
11	12			X
9	10	X		
7	8			X
5	6			X
3	4	X		
1	2			X
681		1	0	2

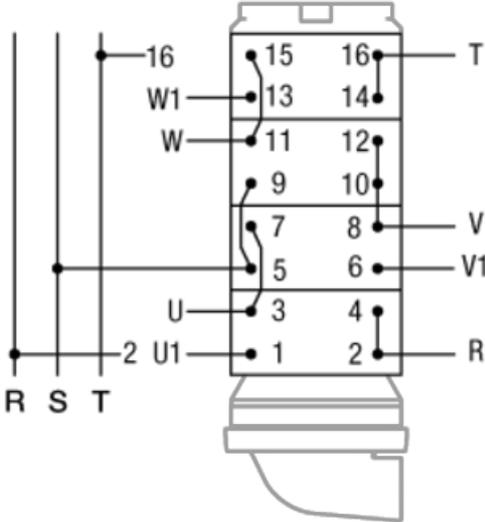

Dimensions

