

A-8710000

REVERSING SWITCH 3P WITH RETURN 12A.D0




| | |
|----------------------------|--|
| Code | 009A-8710000 |
| EAN | 8430892107365 |
| Product description | Tripolar reversing switch, IP20 with 1-0-2 grey front plate with spring return to 0 48x48 for panel fixing. 3 poles 12A. Size D0. Ergonomic screwless quick-mount handle. Connection with cage terminals for 2.5-6 mm ² cable. Compatible with multiple accessories from the A5 series. |


Logistic data

| | |
|---------------------------|----------|
| Customs code | 85365080 |
| ETIM code | EC002611 |
| Package units | 1 |
| Product gross weight (kg) | 0.16 |
| Package height (mm) | 82 |
| Package width (mm) | 50 |
| Package length (mm) | 50 |

Technical data

| | |
|---|--|
| Poles | 3 |
| Operational rating (Ie) | 12A |
| Thermal rating (Ith) | 16 A |
| Wire section (AWG) | 10 |
| Wire section rigid | 2,5 - 6 mm ² |
| Wire section flexible | 2,5 - 6 mm ² |
| Tightening torque | 1,6 Nm |
| Connection screws | M4 |
| Terminal |  |
| Max. fuse protection (gG/aM) | 25/25 A (415 V) 25/25 A (500 V) |
| Conditional shortcircuit current (Icc) | 6 kA (415 V) 6 kA (500 V) |
| Insulating voltage (V~) | 690 |
| Insulating voltage (V...) | 400 |
| Dummy AC-21A | 3 kW (3x230 V) 7,5 kW (3x415 V) 11 kW (3x500 V) |
| Mixed load AC-22A | 2,2 kW (3x230 V) 5,5 kW (3x415 V) 7,5 kW (3x500 V) |
| Motor load AC-23A | 2,2 kW (3x230 V) 4 kW (3x415 V) 5,5 kW (3x500 V) |
| UL Electric characteristics | 1 hp 1-fase (110-120 V) 1,5 hp 1-fase (220-240 V) 1 hp 3-fase (220-240 V) 2 hp 3-fase (380-415 V) 3 hp 3-fase (440-480 V) 3 hp 3-fase (550-600 V) |
| Standard | IEC 60947-3 UL 508 |
| Handle type | Directo |

Connection

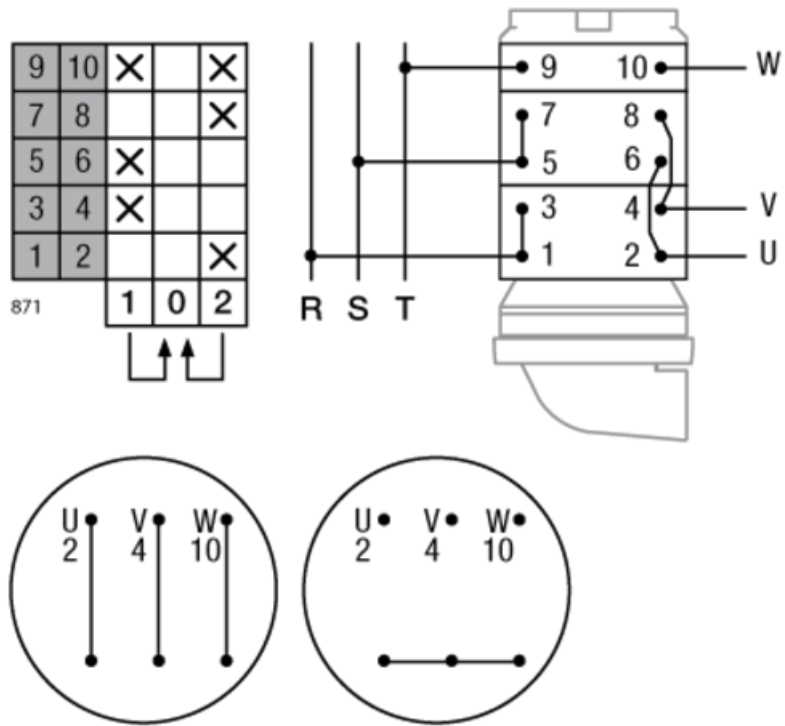

Dimensions

