

## A-8712100

REVERSING SWITCH 3P WITH RETURN 25A.D1



|                            |                                                                                                                                                                                                                                                                                                  |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Code</b>                | 009A-8712100                                                                                                                                                                                                                                                                                     |
| <b>EAN</b>                 | 8430892107402                                                                                                                                                                                                                                                                                    |
| <b>Product description</b> | Tripolar reversing switch, IP20 with 1-0-2 grey front plate with spring return to 0 64x64 for panel fixing. 1 pole 25A. Size D1. Ergonomic screwless quick-mount handle. Connection with cage terminals for 6-16 mm <sup>2</sup> cable. Compatible with multiple accessories from the A5 series. |

## Logistic data

|                     |          |
|---------------------|----------|
| Customs code        | 85365080 |
| ETIM code           | EC002611 |
| Package units       | 1        |
| Package height (mm) | 95       |
| Package width (mm)  | 68       |
| Package length (mm) | 68       |

## Technical data


|                         |                        |
|-------------------------|------------------------|
| Poles                   | 3                      |
| Operational rating (Ie) | 25 A                   |
| Thermal rating (Ith)    | 25 A                   |
| Wire section (AWG)      | 6                      |
| Wire section rigid      | 6 - 25 mm <sup>2</sup> |
| Wire section flexible   | 6 - 16 mm <sup>2</sup> |
| Tightening torque       | 2 Nm                   |
| Connection screws       | M5                     |

### Terminal



|                                        |                                                                                                                                                                |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Max. fuse protection (gG/aM)           | 25/25 A (415 V)<br>25/25 A (500 V)                                                                                                                             |
| Conditional shortcircuit current (Icc) | 6 kA (415 V)<br>6 kA (500 V)                                                                                                                                   |
| Insulating voltage (V~)                | 690                                                                                                                                                            |
| Insulating voltage (V...)              | 600                                                                                                                                                            |
| Dummy AC-21A                           | 7,5 kW (3x230 V)<br>15 kW (3x415 V)<br>18,5 kW (3x500 V)                                                                                                       |
| Mixed load AC-22A                      | 7,5 kW (3x230 V)<br>15 kW (3x415 V)<br>18,5 kW (3x500 V)                                                                                                       |
| Motor load AC-23A                      | 5,5 kW (3x230 V)<br>7,5 kW (3x415 V)<br>11 kW (3x500 V)                                                                                                        |
| UL Electric characteristics            | 2 hp 1-fase (110-120 V)<br>3 hp 1-fase (220-240 V)<br>2 hp 3-fase (220-240 V)<br>3 hp 3-fase (380-415 V)<br>5 hp 3-fase (440-480 V)<br>7 hp 3-fase (550-600 V) |
| Standard                               | IEC 60947-3<br>UL 508                                                                                                                                          |
| Handle type                            | Directo                                                                                                                                                        |

Connection

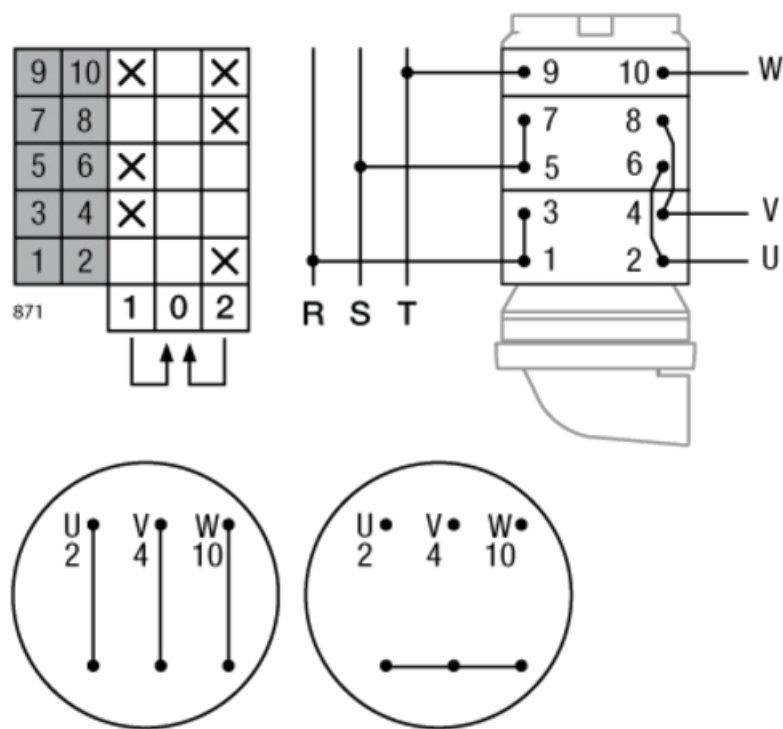

Dimensions

