

AB5523100H

ON-OFF SWITCH DISCONNECTOR 3P 32A.D1 IP69K PADLOCKABLE RED/YELLOW HANDLE



Code	009AB5523100H
EAN	8430892313995

Product description

On-off switch disconnecter with IP69K safety padlockable handle. Red handle/yellow plate with marking 0-I (0 12h 60°). Handle with hygienic design and use of antimicrobial technology. Switch body IP20. Multipole switch breaking 3P 32A. Size D1. Connection with cage terminals for 6-16 mm² cable.

Logistic data

Customs code 85365080

Technical data

Poles	3
Operational rating (Ie)	32 A
Thermal rating (Ith)	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm ²
Wire section flexible	6 - 16 mm ²
Tightening torque	2 Nm
Connection screws	M5

Terminal



Max. fuse protection (gG/aM)	40/32 A (415 V)
	40/32 A (500 V)

Conditional shortcircuit current (Icc)	6 kA (415 V)
	6 kA (500 V)

Insulating voltage (V~)	690
-------------------------	-----

Insulating voltage (V...)	600
---------------------------	-----

Dummy AC-21A	11 kW (3x230 V)
	18,5 kW (3x415 V)
	22 kW (3x500 V)

Mixed load AC-22A	7,5 kW (3x230 V)
	15 kW (3x415 V)
	18,5 kW (3x500 V)

Motor load AC-23A	5,5 kW (3x230 V)
	11 kW (3x415 V)
	15 kW (3x500 V)

UL Electric characteristics	2 hp 1-fase (110-120 V)
	3 hp 1-fase (220-240 V)
	7,5 hp 3-fase (220-240 V)
	10 hp 3-fase (380-415 V)
	10 hp 3-fase (440-480 V)
	15 hp 3-fase (550-600 V)


Standard	IEC 60947-3 / UL 508
----------	----------------------

Handle type	IP69K
-------------	-------

producte.Impact I K	IK10
---------------------	------

Connection

5	6		X
3	4		X
1	2		X
552		0	1

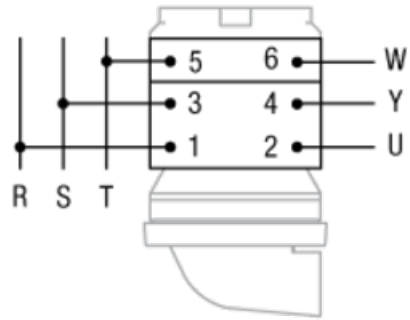

Dimensions

