

AB552C100

ON-OFF SWITCH DISCONNECTOR 3P. 250A D3 PADLOCKABLE RED/YELLOW

Code	009AB552C100
EAN	8430892215367

Product description

Padlockable on-off switch disconnecter, IP20 with red handle/yellow front plate 64x64 for panel fixing. 3 poles 250A. Size D3. Ergonomic screwless quick-mount handle. Cable lug terminal connection for 120 mm² cable. Compatible with multiple accessories from the A5 series.

Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1
Package height (mm)	167
Package width (mm)	121
Package length (mm)	106

Technical data



Poles	3
Operational rating (Ie)	250 A
Thermal rating (Ith)	250 A
Wire section flexible	120 mm ²
Connection screws	M8

Terminal



Max. fuse protection (gG/aM)	250 A (415 V)
	250 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	75 kW (3x230 V)
	132 kW (3x415 V)
	160 kW (3x500 V)
Mixed load AC-22A	75 kW (3x230 V)
	132 kW (3x415 V)
	132 kW (3x500 V)
Motor load AC-23A	75 kW (3x230 V)
	110 kW (3x415 V)
Standard	IEC 60947-3
Handle type	Bloqueable candados

Connection

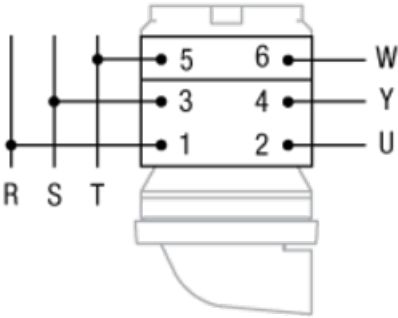

Dimensions

