

AB5530000

ON-OFF SWITCH DISCONNECTOR 4P.12A D0 PADLOCKABLE RED/YELLOW



| | |
|----------------------------|--|
| Code | 009AB5530000 |
| EAN | 8430892125321 |
| Product description | Padlockable on-off switch disconnecter, IP20 with red handle/yellow front plate 64x64 for panel fixing. 4 poles 12A. Size D0. Ergonomic screwless quick-mount handle. Connection with cage terminals for 2.5-6 mm ² cable. Compatible with multiple accessories from the A5 series. |

Logistic data

| | |
|---------------------|----------|
| Customs code | 85365080 |
| ETIM code | EC000216 |
| Package units | 1 |
| Package height (mm) | 95 |
| Package width (mm) | 68 |
| Package length (mm) | 68 |

Technical data


| | |
|-------------------------|-------------------------|
| Poles | 4 |
| Operational rating (Ie) | 12A |
| Thermal rating (Ith) | 16 A |
| Wire section (AWG) | 10 |
| Wire section rigid | 2,5 - 6 mm ² |
| Wire section flexible | 2,5 - 6 mm ² |
| Tightening torque | 1,6 Nm |
| Connection screws | M4 |

Terminal



| | |
|--|---------------------------|
| Max. fuse protection (gG/aM) | 25/25 A (415 V) |
| | 25/25 A (500 V) |
| Conditional shortcircuit current (Icc) | 6 kA (415 V) |
| | 6 kA (500 V) |
| Insulating voltage (V~) | 690 |
| Insulating voltage (V...) | 400 |
| Dummy AC-21A | 3 kW (3x230 V) |
| | 7,5 kW (3x415 V) |
| | 11 kW (3x500 V) |
| Mixed load AC-22A | 2,2 kW (3x230 V) |
| | 5,5 kW (3x415 V) |
| | 7,5 kW (3x500 V) |
| Motor load AC-23A | 2,2 kW (3x230 V) |
| | 4 kW (3x415 V) |
| | 5,5 kW (3x500 V) |
| UL Electric characteristics | 1 hp 1-fase (110-120 V) |
| | 1,5 hp 1-fase (220-240 V) |
| | 1 hp 3-fase (220-240 V) |
| | 2 hp 3-fase (380-415 V) |
| | 3 hp 3-fase (440-480 V) |
| | 3 hp 3-fase (550-600 V) |
| Standard | IEC 60947-3 UL 508 |
| Handle type | Bloqueable candados |

Connection

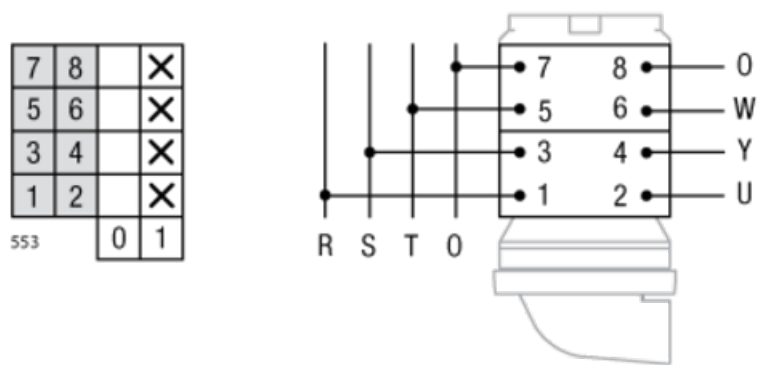

Dimensions

