

AB5536100H

ON-OFF SWITCH DISCONNECTOR 4P 63A.D2 IP69K PADLOCKABLE RED/YELLOW HANDLE



Code	009AB5536100H
-------------	---------------

EAN	8430892314138
------------	---------------

Product description

On-off switch disconnecter with IP69K safety padlockable handle. Red handle/yellow plate with marking 0-I (0 12h 60°). Handle with hygienic design and use of antimicrobial technology. Switch body IP20. Multipole switch breaking 4P 63A. Size D2. Connection with cage terminals for 16-50 mm² cable.


Logistic data

Customs code 85365080

Technical data

Poles	4
Operational rating (Ie)	63 A
Thermal rating (Ith)	70 A
Wire section (AWG)	16 - 1
Wire section flexible	16 - 50 mm ²
Tightening torque	3,5 Nm
Connection screws	M8

Terminal



63/63 A (415 V)

Max. fuse protection (gG/aM) 63/63 A (500 V)

8 kA (415 V)

Conditional shortcircuit current (Icc) 8 kA (500 V)

Insulating voltage (V~) 690

Insulating voltage (V...) 600

22 kW (3x230 V)

Dummy AC-21A 45 kW (3x415 V)

45 kW (3x500 V)

18,5 kW (3x230 V)

Mixed load AC-22A 37 kW (3x415 V)

45 kW (3x500 V)

15 kW (3x230 V)

Motor load AC-23A 22 kW (3x415 V)

30 kW (3x500 V)

5 hp 1-fase (110-120 V)

10 hp 1-fase (220-240 V)

15 hp 3-fase (220-240 V)

UL Electric characteristics

25 hp 3-fase (380-415 V)

30 hp 3-fase (440-480 V)


32 hp 3-fase (550-600 V)

Standard IEC 60947-3 / UL 508

Handle type IP69K

producte.Impact I K IK10

Connection

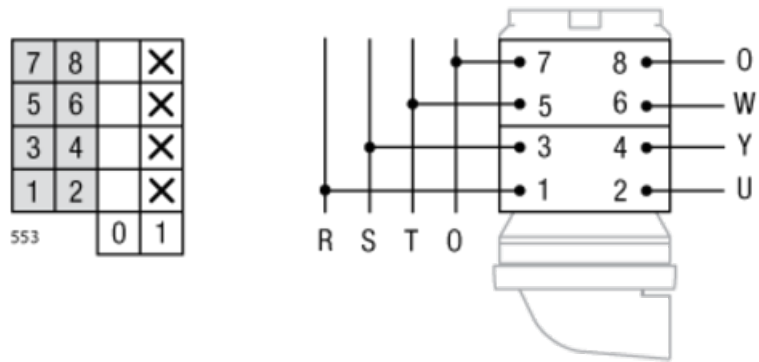

Dimensions

