

## AB553B100

ON-OFF SWITCH DISCONNECTOR 4P.200A.D3 BLOQUEO CANDADO ROJO/AMARILLO



|                            |                                                                                                                                                                                                                                                                                             |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Code</b>                | 009AB553B100                                                                                                                                                                                                                                                                                |
| <b>EAN</b>                 | 8430892165198                                                                                                                                                                                                                                                                               |
| <b>Product description</b> | Padlockable on-off switch disconnecter, IP20 with red handle/yellow front plate 64x64 for panel fixing. 4 poles 200A. Size D3. Ergonomic screwless quick-mount handle. Cable lug terminal connection for 95 mm <sup>2</sup> cable. Compatible with multiple accessories from the A5 series. |

Logistic data

|                     |          |
|---------------------|----------|
| Customs code        | 85365080 |
| ETIM code           | EC000216 |
| Package units       | 1        |
| Package height (mm) | 167      |
| Package width (mm)  | 121      |
| Package length (mm) | 106      |

Technical data


|                         |                    |
|-------------------------|--------------------|
| Poles                   | 4                  |
| Operational rating (Ie) | 200 A              |
| Thermal rating (Ith)    | 200 A              |
| Wire section flexible   | 95 mm <sup>2</sup> |
| Connection screws       | M8                 |

Terminal



|                                        |                     |
|----------------------------------------|---------------------|
| Max. fuse protection (gG/aM)           | 200 A (415 V)       |
|                                        | 200 A (500 V)       |
| Conditional shortcircuit current (Icc) | 8 kA (415 V)        |
|                                        | 8 kA (500 V)        |
| Insulating voltage (V~)                | 690                 |
| Insulating voltage (V...)              | 600                 |
| Dummy AC-21A                           | 55 kW (3x230 V)     |
|                                        | 110 kW (3x415 V)    |
|                                        | 132 kW (3x500 V)    |
| Mixed load AC-22A                      | 55 kW (3x230 V)     |
|                                        | 110 kW (3x415 V)    |
|                                        | 110 kW (3x 500 V)   |
| Motor load AC-23A                      | 55 kW (3x230 V)     |
|                                        | 90 kW (3x415 V)     |
| Standard                               | IEC 60947-3         |
| Handle type                            | Bloqueable candados |

Connection

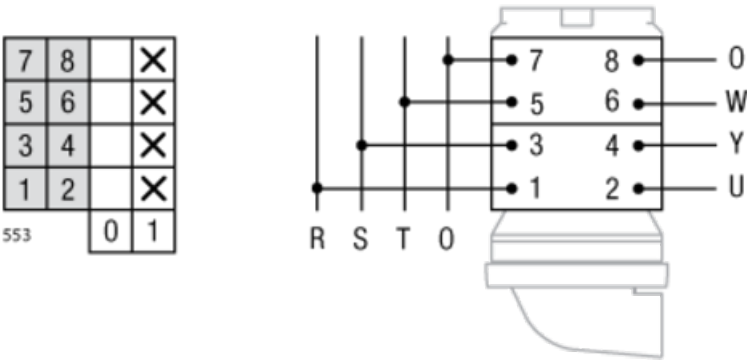

## Dimensions

