

## ABA526100

SWITCH 3P 63A D2 PADLOCKABLE 1NO



|      |               |
|------|---------------|
| Code | 009ABA526100  |
| EAN  | 8430892157759 |

## Logistic data

|               |          |
|---------------|----------|
| ETIM code     | EC002611 |
| Package units | 1        |

## Technical data


|                         |                         |
|-------------------------|-------------------------|
| Poles                   | 3                       |
| Operational rating (Ie) | 63 A                    |
| Thermal rating (Ith)    | 70 A                    |
| Wire section (AWG)      | 16 - 1                  |
| Wire section rigid      | 6 - 25 mm <sup>2</sup>  |
| Wire section flexible   | 16 - 50 mm <sup>2</sup> |
| Tightening torque       | 3,5 Nm                  |
| Connection screws       | M8                      |

### Terminal



|                                        |                          |
|----------------------------------------|--------------------------|
| Max. fuse protection (gG/aM)           | 63/63 A (415 V)          |
|                                        | 63/63 A (500 V)          |
| Conditional shortcircuit current (Icc) | 8 kA (415 V)             |
|                                        | 8 kA (500 V)             |
| Insulating voltage (V~)                | 690                      |
| Insulating voltage (V...)              | 600                      |
| Dummy AC-21A                           | 22 kW (3x230 V)          |
|                                        | 45 kW (3x415 V)          |
|                                        | 45 kW (3x500 V)          |
| Mixed load AC-22A                      | 18,5 kW (3x230 V)        |
|                                        | 37 kW (3x415 V)          |
|                                        | 45 kW (3x500 V)          |
| Motor load AC-23A                      | 18,5 kW (3x230 V)        |
|                                        | 30 kW (3x415 V)          |
|                                        | 37 kW (3x500 V)          |
| UL Electric characteristics            | 5 hp 1-fase (110-120 V)  |
|                                        | 10 hp 1-fase (220-240 V) |
|                                        | 15 hp 3-fase (220-240 V) |
|                                        | 25 hp 3-fase (380-415 V) |
|                                        | 30 hp 3-fase (440-480 V) |
|                                        | 32 hp 3-fase (550-600 V) |
| Standard                               | IEC 60947-3              |
|                                        | UL 508                   |
| Handle type                            | Bloqueable candados      |

Connection

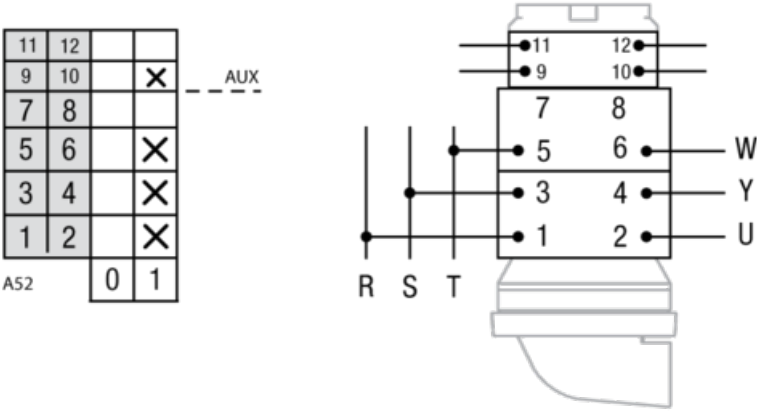

Dimensions

