

## AES112000

PUSH AND TURN DISCREPANCY SWITCH 25A 1M 1S



<b>Code</b>	009AES112000
<b>EAN</b>	8430892244114
<b>Product description</b>	Discrepancy switch, type push and turn with return. Fixing 4 points 36x36 with central hole 40mm diameter. Light frontal handle with white leds, supply multivoltage 24-240vac / 24-110vdc. 1 contact signal and 1 contact control rated 25A. Connection with cage terminals for 1,5-6mm <sup>2</sup> cable

## Logistic data

---

Customs code	85365080
ETIM code	EC002611
Package units	1
Package height (mm)	123
Package width (mm)	68
Package length (mm)	68

## Technical data

---


Operational rating (Ie)	25 A
Thermal rating (Ith)	25 A
Wire section (AWG)	10
Wire section rigid	2,5 - 6 mm <sup>2</sup>
Wire section flexible	2,5 - 6 mm <sup>2</sup>
Tightening torque	1,6 Nm
Connection screws	M4

### Terminal



<b>Max. fuse protection (gG/aM)</b>	25/25 A (415 V)
	25/25 A (500 V)
<b>Conditional shortcircuit current (Icc)</b>	6 kA (415 V)
	6 kA (500 V)
<b>Insulating voltage (V~)</b>	690
<b>Insulating voltage (V...)</b>	400
<b>Dummy AC-21A</b>	7,5 kW (3x230 V)
	15 kW (3x415 V)
	18,5 kW (3x500 V)
<b>Mixed load AC-22A</b>	7,5 kW (3x230 V)
	15 kW (3x415 V)
	18,5 kW (3x500 V)
<b>Motor load AC-23A</b>	5,5 kW (3x230 V)
	7,5 kW (3x415 V)
	11 kW (3x500 V)
<b>UL Electric characteristics</b>	2 hp 1-fase (110-120 V)
	3 hp 1-fase (220-240 V)
	2 hp 3-fase (220-240 V)
	3 hp 3-fase (380-415 V)
	5 hp 3-fase (440-480 V)
	7 hp 3-fase (550-600 V)
<b>Standard</b>	IEC 60947-3 UL 508

## Connection

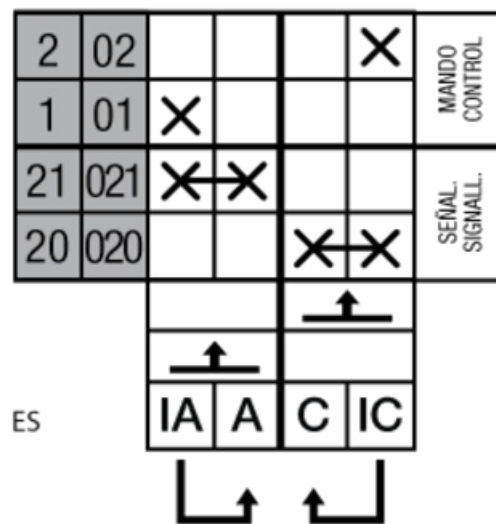

## Dimensions

