

AB5522009H

SWITCH DISCONNECTOR 3P.25A. IP69K PADLOCKABLE HANDLE IN INOX ENCLOSURE



Code	009AB5522009H
EAN	8430892315999

Product description	<p>IP69K 3-pole 25A safety switch in IP65 stainless steel enclosure. 1IN enclosure in 316L stainless steel with electropolished finish suitable for highly corrosive environments or applications with hygienic requirements, dimensions 110x110x80. Upper inlet and lower outlet M25 holes. Fixing to the surface by 4 points. Red / yellow padlockable handle (up to 2 padlocks of 8mm diameter). Connection with cage terminals for 2.5-6 mm² cable. IP66 cable glands and plugs as accesories.</p>
----------------------------	---

Logistic data

Customs code 85365080

Technical data

Poles	3
Operational rating (Ie)	25 A
Thermal rating (Ith)	25 A
Wire section (AWG)	10
Wire section rigid	2,5 - 6 mm ²
Wire section flexible	2,5 - 6 mm ²
Tightening torque	1,6 Nm
Connection screws	M4

Terminal



25/25 A (415 V)
 Max. fuse protection (gG/aM) 25/25 A (500 V)

6 kA (415 V)
 Conditional shortcircuit current (Icc) 6 kA (500 V)

Insulating voltage (V~) 690
 Insulating voltage (V...) 400

7,5 kW (3x230 V)
 Dummy AC-21A 15 kW (3x415 V)
 18,5 kW (3x500 V)

7,5 kW (3x230 V)
 Mixed load AC-22A 15 kW (3x415 V)
 18,5 kW (3x500 V)


5,5 kW (3x230 V)
 Motor load AC-23A 7,5 kW (3x415 V)
 11 kW (3x500 V)

2 hp 1-fase (110-120 V)
 3 hp 1-fase (220-240 V)
 2 hp 3-fase (220-240 V)
 UL Electric characteristics 3 hp 3-fase (380-415 V)
 5 hp 3-fase (440-480 V)
 7 hp 3-fase (550-600 V)

Standard IEC 60947-3 / UL 508
 Enclosure type INOX
 producte.Impact I K IK10

Connection

5	6		X
3	4		X
1	2		X
552		0	1

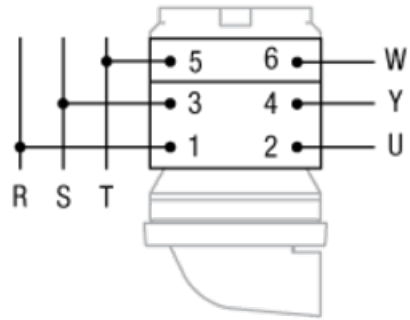

Dimensions

