

AB5523109H

SWITCH DISCONNECTOR 3P.32A. IP69K PADLOCKABLE HANDLE IN INOX ENCLOSURE



Code	009AB5523109H
EAN	8430892316002

Product description	<p>IP69K 3-pole 32A safety switch in IP65 stainless steel enclosure. 2IN enclosure in 316L stainless steel with electropolished finish suitable for highly corrosive environments or applications with hygienic requirements, dimensions 150x150x90. Upper inlet and lower outlet M32 holes. Fixing to the surface by 4 points. Red / yellow padlockable handle (up to 2 padlocks of 8mm diameter). Connection with cage terminals for 6-16 mm² cable. IP66 cable glands and plugs as accesories.</p>
----------------------------	--

Logistic data

Customs code	85365080
--------------	----------

Technical data

Poles	3
Operational rating (Ie)	32 A
Thermal rating (Ith)	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm ²
Wire section flexible	6 - 16 mm ²
Tightening torque	2 Nm
Connection screws	M5

Terminal



	40/32 A (415 V)
Max. fuse protection (gG/aM)	40/32 A (500 V)

	6 kA (415 V)
Conditional shortcircuit current (Icc)	6 kA (500 V)

Insulating voltage (V~)	690
Insulating voltage (V...)	600

	11 kW (3x230 V)
Dummy AC-21A	18,5 kW (3x415 V)
	22 kW (3x500 V)

	7,5 kW (3x230 V)
Mixed load AC-22A	15 kW (3x415 V)
	18,5 kW (3x500 V)


	5,5 kW (3x230 V)
Motor load AC-23A	11 kW (3x415 V)
	15 kW (3x500 V)

	2 hp 1-fase (110-120 V)
	3 hp 1-fase (220-240 V)
UL Electric characteristics	7,5 hp 3-fase (220-240 V)
	10 hp 3-fase (380-415 V)
	10 hp 3-fase (440-480 V)
	15 hp 3-fase (550-600 V)

Standard	IEC 60947-3 / UL 508
Enclosure type	INOX
producte.Impact I K	IK10

Connection

5	6		×
3	4		×
1	2		×
552	0	1	

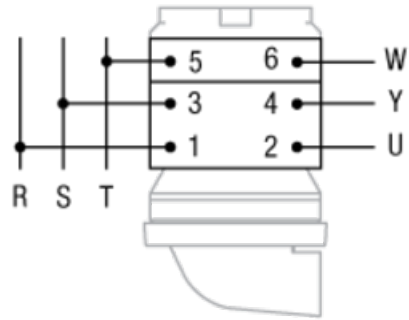

Dimensions

