

AC553A107

ON-OFF SWITCH DISCONNECTOR 4P.160A. ENCLOSED IP65 PADLOCKABLE BLACK/GREY

Code	009AC553A107
EAN	8430892166447

Product description

4-pole 160A safety switch in IP65 enclosure. E2 sheet steel enclosure suitable for indoor or outdoor use in RAL7035 grey color, dimensions 250x300x200. High impact resistance IK10. Base mounted switch with extended shaft and interlock in closed position. Black / grey padlockable handle (up to 4 padlocks of 8mm diameter). Earthing terminal. Cable lug terminal connection for 70 mm² cable

Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1
Package height (mm)	280
Package width (mm)	251
Package length (mm)	301

Technical data

Poles	4
Operational rating (Ie)	160 A
Thermal rating (Ith)	160 A
Wire section flexible	70 mm ²
Connection screws	M8


Terminal



Max. fuse protection (gG/aM)	160 A (415 V)
	160 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	45 kW (3x230 V)
	90 kW (3x415 V)
	110 kW (3x500 V)
Mixed load AC-22A	37 kW (3x230 V)
	75 kW (3x415 V)
	90 kW (3x500 V)
Motor load AC-23A	30 kW (3x230 V)
	52 kW (3x415 V)
	65 kW (3x500 V)
Standard	IEC 60947-3
Enclosure type	METAL

Connection

7	8		×
5	6		×
3	4		×
1	2		×
553			
	0	1	

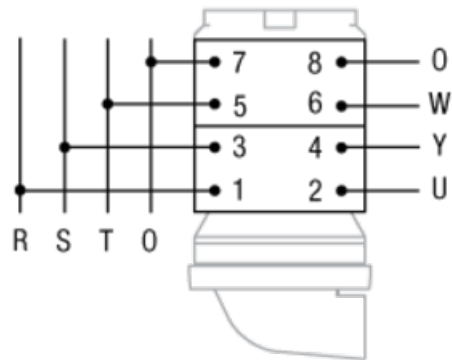

Dimensions

