

MPV514100




Code	024MPV514100
EAN	84308920292788

Technical data

Operational rating (Ie)	40 A - (1000VDC) / 25 A (1500VDC)
Impulse voltage (Uimp)	8 kV
Wire section rigid	10 mm ²
Wire section flexible	6 mm ²
Tightening torque	1,2 Nm
Connection screws	M4
Rated short-time withstand current 1s (Icw)	500 A
DC21B	60A 1000V DC21B

Connection

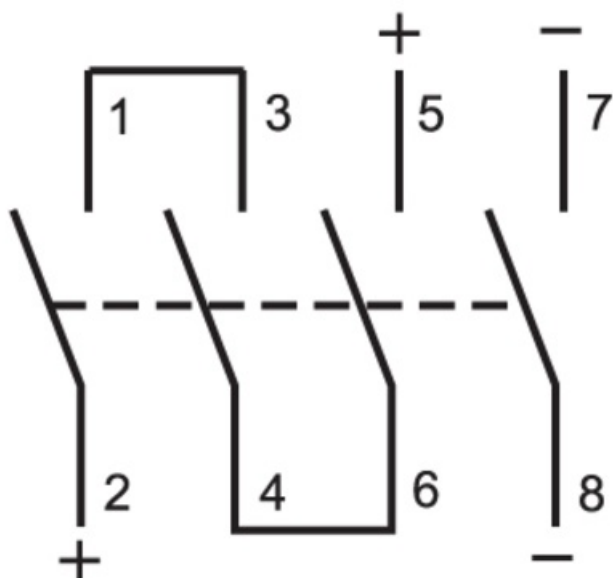

Dimensions

