

## 67230250

NH FUSE WITH INDICATOR 250A.AM S2



<b>Code</b>	01867230250
<b>EAN</b>	8430892110150
<b>Product description</b>	NH blade fuse of compact dimensions size 2 Nominal current of 250A with protection curve class AM. Suitable for the protection of engines, transformers and equipment with high boot tips. For tensions up to 690V offers protection against overload and short circuit with a 120KA Rupture capacity up to 500V and 80KA for 690V. Ceramic highly resistant to thermal shocks and pressure. Copper contacts with silver bath and specially for easy introduction into the fuse base. Central melting indicator For quick visualization of the fuse status, spikelet explorer of the stainless steel indicator reverses more reliability when avoiding corrosion and aging problems.


## Fuse data

Fuse type	NH
Operating voltage	690 V
Utilisation category	aM
Breaking capacity	120 kA
Fuse indicator	Si / Yes
Standards	IEC 60269-1/2

## Technical data

Standard	IEC 60269-2
Size	2C

## Características Fusible

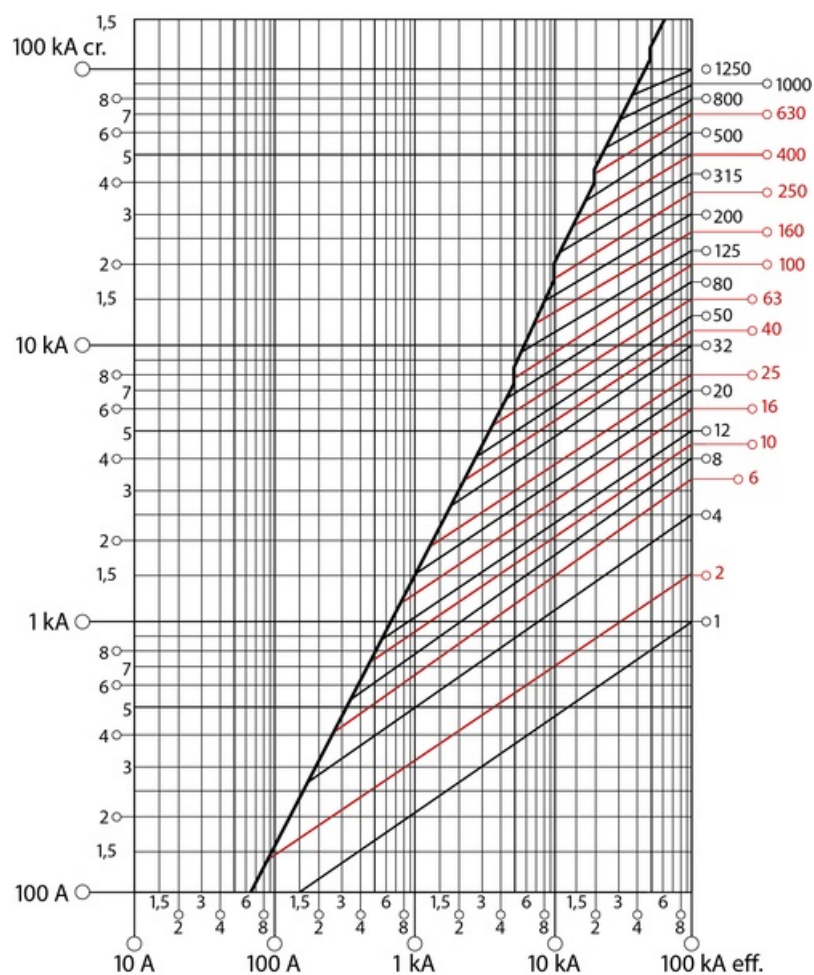

## Dimensions

---

