

## TA211M

TA211 MINI 220-240 V AC 50/60Hz



<b>Code</b>	014TA211M
<b>EAN</b>	8430892312103


### Product description

Analogue daily cycle time switch with ON/OFF programming, one module wide, 220-240V AC 50/60Hz power supply, one NO contact, switching capacity 15A (resistive load) and 4A (inductive load  $\cos\phi$  0.6), minimum switching time 15 minutes, flap programming, switch for manual control with two positions: automatic and permanent ON, 100 hours of power reserve, DIN rail mounting, cage terminal connection up to 4mm<sup>2</sup>, power consumption 1 VA, IP20 protection.

## Time switches

Supply	220-240 V
Nominal frequency	50-60Hz
Power consumption	1 VA
Channel	1
Operating temperature	-10°C +50°C
Degree of protection	IP20
Minimum switching time	15 min
Max. wire cross section	4 mm <sup>2</sup>
Net weight (gr)	70
Breaking capacity	Resistive load 15 A Load incandescent bulb 1000 W Inductive load Cos =0,6 4A
Type of contact	NO
Power reserve	100 h
Connection	screw terminal
Cycle	24 hours

## Connection

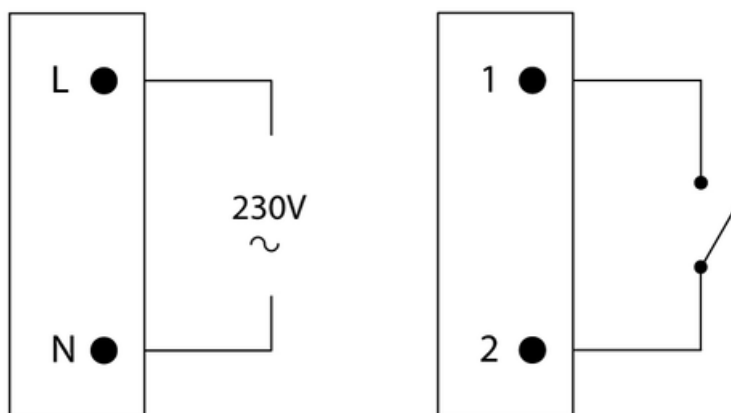

## Dimensions

---

