

AB5563107

ON-OFF SWITCH DISCONNECTOR 6P 32A ENCLOSED IP65 PADLOCKABLE RED/YELLOW



Code 009AB5563107

EAN 8430892163378


Product description

6-pole 32A safety switch in IP65 enclosure. E0 polycarbonate enclosure suitable for indoor or outdoor use, RAL7035 grey cover and black base, dimensions 100x130x90. M20 easy-open knockouts, two on top, two on bottom and two at the base. 4 points surface fixing. Base mounted switch with extended shaft and interlock in closed position. Red / yellow padlockable handle (up to 4 padlocks of 8mm diameter). Earthing terminal. Connection with cage terminals for 6-16 mm² cable.


Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1
Product gross weight (kg)	0.58
Package height (mm)	130
Package width (mm)	135
Package length (mm)	100

Technical data

Poles	6
Operational rating (Ie)	32 A
Thermal rating (Ith)	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm ²
Wire section flexible	6 - 16 mm ²
Tightening torque	2 Nm
Connection screws	M5
Terminal	
Max. fuse protection (gG/aM)	40/32 A (415 V) 40/32 A (500 V)
Conditional shortcircuit current (Icc)	6 kA (415 V) 6 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	11 kW (3x230 V) 18,5 kW (3x415 V) 22 kW (3x500 V)
Mixed load AC-22A	7,5 kW (3x230 V) 15 kW (3x415 V) 18,5 kW (3x500 V)
Motor load AC-23A	5,5 kW (3x230 V) 11 kW (3x415 V) 15 kW (3x500 V)
UL Electric characteristics	2 hp 1-phase (110-120 V) 3 hp 1-phase (220-240 V) 7,5 hp 3-phase (220-240 V) 10 hp 3-phase (380-415 V) 10 hp 3-phase (440-480 V) 15 hp 3-phase (550-600 V)
Standard	IEC 60947-3 UL 508
Enclosure type	PLASTIC

Connection

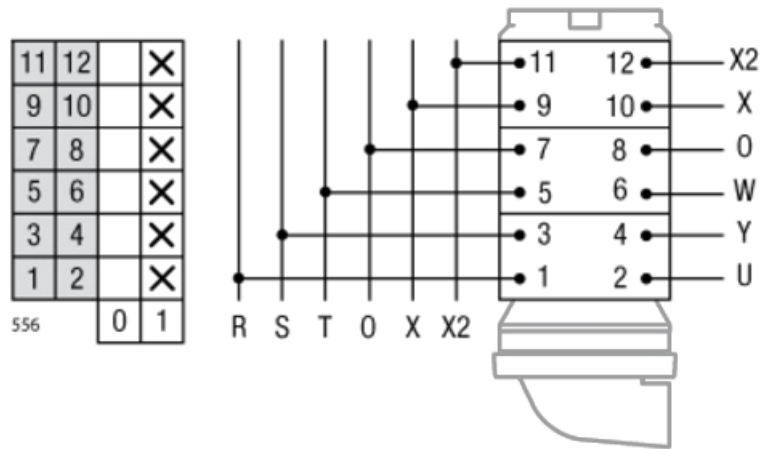

Dimensions

