

AC5566107

ON-OFF SWITCH DISCONNECTOR 6P.63A. ENCLOSED IP65 PADLOCKABLE BLACK/GREY



Code	009AC5566107
EAN	8430892163460

Product description

6-pole 63A safety switch in IP65 enclosure. E1 polycarbonate enclosure suitable for indoor or outdoor use, RAL7035 grey cover and black base, dimensions 130x160x125. M20/M25 easy-open knockouts, two on top, two on bottom and two at the base. 4 points surface fixing. Base mounted switch with extended shaft and interlock in closed position. Black / grey padlockable handle (up to 4 padlocks of 8mm diameter). Earthing terminal. Connection with cage terminals for 16-50 mm² cable.


Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1

Technical data


Poles	6
Operational rating (Ie)	63 A
Thermal rating (Ith)	70 A
Wire section (AWG)	16 - 1
Wire section flexible	16 - 50 mm ²
Tightening torque	3,5 Nm
Connection screws	M8

Terminal



Max. fuse protection (gG/aM)	63/63 A (415 V)
	63/63 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	22 kW (3x230 V)
	45 kW (3x415 V)
	45 kW (3x500 V)
Mixed load AC-22A	18,5 kW (3x230 V)
	37 kW (3x415 V)
	45 kW (3x500 V)
Motor load AC-23A	18,5 kW (3x230 V)
	30 kW (3x415 V)
	37 kW (3x500 V)
UL Electric characteristics	5 hp 1-phase (110-120 V)
	10 hp 1-phase (220-240 V)
	15 hp 3-phase (220-240 V)
	25 hp 3-phase (380-415 V)
	30 hp 3-phase (440-480 V)
	32 hp 3-phase (550-600 V)
Standard	IEC 60947-3 UL 508
Enclosure type	PLASTIC

Connection

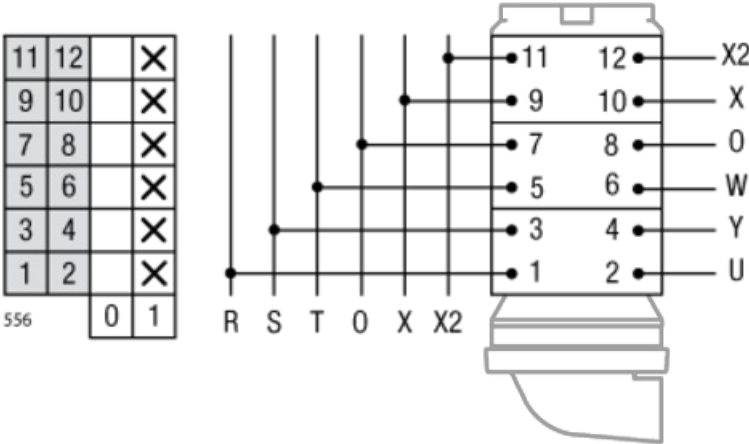

Dimensions

