

## AC556A107

ON-OFF SWITCH 6P.160A. IP65 ENCLOSURE

<b>Code</b>	009AC556A107
<b>EAN</b>	8430892166485

---

**Product description**

4-pole 160A safety switch in IP65 enclosure. E2 sheet steel enclosure suitable for indoor or outdoor use in RAL7035 grey color, dimensions 250x300x200. High impact resistance IK10. Base mounted switch with extended shaft and interlock in closed position. Black / grey padlockable handle (up to 4 padlocks of 8mm diameter). Earthing terminal. Cable lug terminal connection for 70 mm<sup>2</sup> cable

---

## Logistic data

---

Customs code	85365080
ETIM code	EC000216
Package units	1

## Technical data

---


Poles	6
Operational rating (Ie)	160 A
Thermal rating (Ith)	160 A
Wire section flexible	70 mm <sup>2</sup>
Connection screws	M8

### Terminal



Max. fuse protection (gG/aM)	160 A (415 V)
	160 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	45 kW (3x230 V)
	90 kW (3x415 V)
	110 kW (3x500 V)
Mixed load AC-22A	37 kW (3x230 V)
	75 kW (3x415 V)
	90 kW (3x500 V)
Motor load AC-23A	30 kW (3x230 V)
	52 kW (3x415 V)
	65 kW (3x500 V)
Standard	IEC 60947-3
Enclosure type	METAL

## Connection

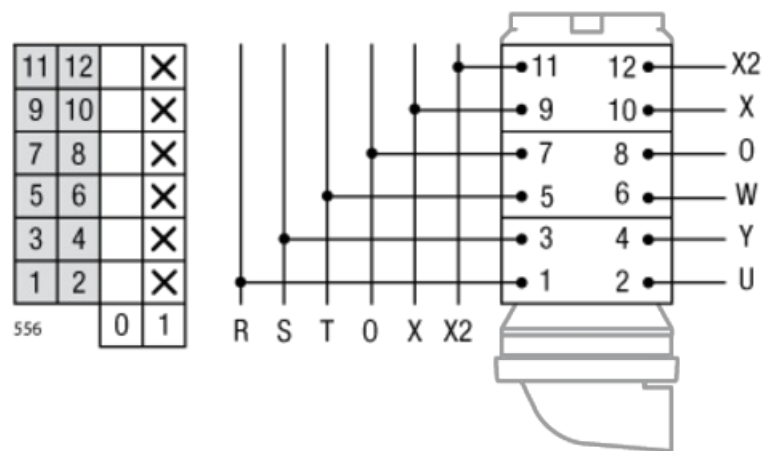

## Dimensions

